

## LEGIONELLA FILTER SHOWER HEAD & TAP





## **APPLICATION**

Point-of-use safety filter for water systems where there is a potential risk of contamination with legionella or other harmful pathogens.

## LEGIONELLA AND BACTERIA CONTROL

Legionella shower and tap filter systems are widely used in hospitals, nursing homes, and care facilities, ensuring the safety of patients, residents, and staff. Our sterilized range of shower and tap filters has proven to be an excellent choice for ensuring water safety in high-risk areas such as hematology, oncology, burn centers, critical and intensive care units, and operating rooms.


Inhaling legionella bacteria can cause severe pneumonia, known as Legionnaires' disease. Infection occurs through inhalation of legionella bacteria that can enter the air as microscopic, aerosolized water droplets. Legionella inhalation can occur in various situations:

- Water spraying, such as showers and taps with spray heads
- In a hot tub with water bubbles
- Humidification through devices that aerosolize water, such as CPAP machines or humidifiers
- The use of wet cooling towers, water systems that cool buildings or industrial processes by spraying water

In practice, the following locations with a collective water supply or shared plumbing network have a higher risk of legionella contamination in drinking water. These are referred to as 'priority' locations:


- Asylum seeker centers
- Swimming facilities such as pools and saunas
- Gas stations, truck stops, and roadside restaurants with showers
- Holiday parks and (mini) campgrounds
- Correctional facilities such as prisons and police stations
- Marinas
- Lodging accommodations such as hotels, guesthouses, and boarding houses
- Hospitals and healthcare facilities

Certification: The medical water filters, sterile series, comply with the requirements of the Medical Device Directive 93/42/EEC

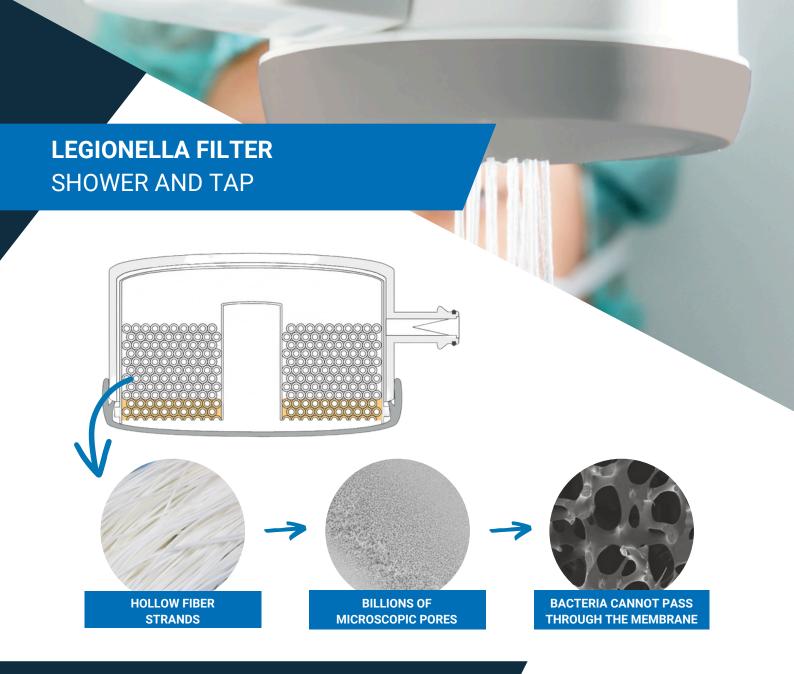

## **LEGIONELLA FILTER RANGE**







Starter kit legionella tap filter

Various stainless steel adapters for mounting the legionella tap filter on existing faucets of various brands



External 24 mm to 22 mm External 21.5 mm to 22 mm




External 18 mm to 22 mm



External 1/2" to 22 mm



18 mm internal to 22 mm external

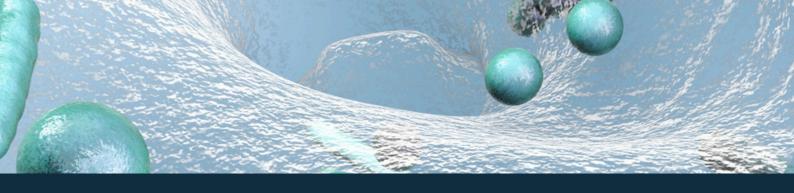



Stay updated on developments in filtration. Scan the QR code and follow us on LinkedIn. in

